

DEPRAG

Operating Instruction Booklet

Pneumatic Chipping Hammer

MFK11-1

MFK14-1

210451 C

210451 A

Dear Customer:

This tool is the result of more than 70 years of experience in the design and manufacturing of pneumatic tools for the industrial market.

We kindly ask that you read these operating instructions carefully so that you will be able to use this tool safely and for many years to come. If you need additional information, please contact your DEPRAG

Representative, one of our international support offices or us direct at DEPRAG. We will be happy to answer any questions. Please visit our web site: www.deprag.com

1 List of Contents

1	LIST OF CONTENTS	2
2	SAFETY TIPS	3
2.1.	General Safety Tips	3
2.2.	Safety Tips for non-rotating/ impact tools.....	4
2.3.	Owner Obligation	5
2.4.	Operator Obligation	5
2.5.	Warranty and Liability	6
2.6.	Symbol Description.....	7
2.7.	Observe Environmental Regulations	9
3	DESIGNATED EQUIPMENT USE	9
4	INSTALLATION.....	10
5	OPERATION	11
6	HANDLING.....	11
7	ASSEMBLY - DISASSEMBLY.....	11
7.1.	Spare Parts Drawing.....	13
8	MAINTENANCE AND UPKEEP	14
8.1.	Wear Parts.....	15
8.2.	Trouble Shooting	16
9	DELIVERY CAPACITY.....	17
10	STORAGE	17
11	TECHNICAL DATA.....	17
12	DISPOSAL.....	18
13	CONFORMITY DECLARATION	19
14	SERVICE LOCATIONS AND AUTHORIZED PARTNERS.....	20

2 Safety Tips

2.1. General Safety Tips



Before operating tool make sure to carefully read and observe this operating instruction.

Generally, the operator of the equipment and/or machinery is responsible for the equipment's perfect condition and operation, while observing all necessary safety regulations. The equipment and/or machinery has been constructed in accordance with the newest level of technology while recognizing all necessary safety-related requirements. Nevertheless, while operating the equipment and/or machinery there is a risk of bodily harm to the operator as well as damage to equipment and/or machinery and other property.

Operate the equipment and/or machinery only if equipment/machinery

- Is used for the task it was designed for
- is in perfect working condition and safe to use.


It is important to observe the technical data of the equipment, especially in regards to the environmental temperatures. The designated area of use for this equipment is clearly described in chapter *Designated Equipment Use* and those requirements have to be observed as well. Prerequisite for the safe conduct and the uninterrupted operation of the equipment, is the knowledge of the basic safety tips and the safety regulations. Additionally, all current regulations for a safe operational area, for accident-prevention guidelines of electrical and mechanical installations, as well as noise suppression demands must be observed. During any maintenance or repair work, a clean work surface is recommended. Also, it is not recommended to either eat or smoke during repair or maintenance. Arbitrary changes made to the equipment, which alters its designated use, voids the warranty and cancels the manufacturers liability.

- The tool is not insulated to protect against an electrical power surge.
- It is not recommended to use this tool in explosive hazardous environments, unless it was specifically designed for such a use.
- During the disconnection or reconnection of the tool from the compressed air, an injury is possible because of a whipping pressure-hose.

The operating instruction booklet, especially the safety symbols and safety tips attached to the equipment or included in the documentation, must be observed at all times by all persons getting into contact with the equipment.

2.2. Safety Tips for non-rotating/ impact tools



- Disconnect tool from power supply when exchanging tool inserts or servicing the tool.
 - Do not wear any loose clothing or jewelry. These may get caught by moving parts. Make sure to wear a hair-net.
 - Keep your hands off the tooling used.
 - Pay attention to possible abrupt movements of the machine due to reaction forces or breaking of used tooling or workpieces.
 - Working with hammers may produce dust and depending on the material of the working surface this may be bad for the operator's health.
 - Personal protective devices and dust vacuum systems must be provided depending on the material of the work pieces / surfaces.
 - Wear eye and ear protection; gloves and protective clothing is recommended, too.
 - Chiseling operations may cause fragmentation or even destruction of the work piece.
 - The tooling of heavy-duty hammers such as concrete breakers is exposed to especially rough treatment and after some time of use may break due to fatigue.
 - Insert tools improperly fastened or damaged may cause strong vibrations.
 - The operator's incorrect body carriage will not allow a proper reaction to normal or unexpected movements of the hammer. Therefore, please make sure to carry yourself so that you are even prepared for a possible breaking of the insert tool.
 - Holding the hammer in the hand freely may lead to vibration injuries.
-  • The maximum operating pressure (flow pressure) must not be exceeded. A pressure regulator should be integrated so that the pressure will be adjusted before reaching the hammer.
- Please note that the insert tool may turn a few more cycles after switch-off.
 - In case air supply is interrupted, make sure to release start button/lever, because otherwise tool will restart with re-installed air supply.

- Permissible inserting tools with a suitable shaft diam. only must be used.
- Do not run tools in the vicinity of inflammable liquids or gases.
- Use lubricators recommended by DEPRAG, only.
- Make sure to lock inserting tool against loosening/dropping out (using a holding spring, catch or flap).
- Pay attention to firmly tighten handle with the cylinder and the presence of the o-ring with the locking pin on the screw cap.

2.3. Owner Obligation

The owner is obliged to only let persons operate the equipment, who

- are familiar with basic work environment safety rules and accident-preventing regulations. Also, those persons must have been instructed in the correct use of the equipment.
- have read and understood all safety and warning notifications in the Operating Instruction Booklet, as well as all other documentation pertaining to this equipment.
- check and confirm at regular intervals, that a safety oriented operation is guaranteed.

Only qualified and authorized personnel is allowed to operate, maintain and repair this equipment. A malfunction, which impairs operator safety, must be immediately removed.

2.4. Operator Obligation

Personnel, who is engaged in the operation of the equipment, must always be committed to

- observe the basic safety and accident preventing regulations,
- read and observe the safety and warning notifications of this operating instruction booklet.

2.5. Warranty and Liability

Unless otherwise specified, our “General Sales and Delivery Conditions” apply. Warranty and liability claims in regards to persons or equipment damages are invalid, if one or several of the following causes apply:

- Use of the equipment in a non-designated application.
- Improper installation, operation, service or maintenance of the machine.
- Operation of the machine with either defective or removed safety and protection devices.
- Non-observance of the requirements stated in the operating instruction booklet, in regards to transportation, storage, mounting, installation, operation, maintenance and service of the equipment.
- Structural change or adjustment on the equipment to a non-designated use.
- Inadequate supervision of wear parts.
- Improper repair, inspection or maintenance.
- Catastrophic cases because of a war, acts of god or other reasons which are beyond our control.

2.6. Symbol Description



Read and observe the Operating Instruction Booklet, prior to and during operation of tool.



DANGER

Reference to an immediate danger to a person. May lead to serious injuries or even death, if unobserved!



Properly recycle environmentally damaging grease, cooling agents or detergents



RECOMMENDATIONS

Important or additional information on the equipment or in the documentation



Use eye protection or wear safety goggles




Wear hearing protection



Warning against hand-injuries.

Attention: Keep away your hands from areas, which are marked with this symbol!



Hands may be crushed, seized or otherwise injured.



ESD-protected area

Equipment may be damaged or destroyed by an electrostatic discharge.

Maintenance and repair on hydraulic and pneumatic equipment may only be performed by specially trained personnel!



Disconnect equipment from air supply, prior to repair of pneumatic or hydraulic equipment.

Provide regular preventive maintenance on hoses and airlines. Exchange hose lines, even if there is no visible damage! (Observe corresponding requirements of the manufacturer!)

After repair and maintenance, check the following items:

- make sure all detached and re-attached connections are solid.
- confirm that removed covers, screens or filters were re-installed
- During disconnecting or reconnecting of an air-operated equipment, injury may occur due to a whipping air-hose

After conclusion of maintenance or repair and prior to start of operation, make sure to

- remove all materials, tools and other supplies needed for the maintenance or repair from work area of the equipment
- remove leaking liquid or oils
- make sure all safety devices on the equipment work perfectly!

2.7. Observe Environmental Regulations



When working on or with the equipment, it is imperative to observe all requirements in regards to waste-disposal and proper recycling.

Especially during installation, repair or maintenance, water damaging agents such as

- lubricating grease and oil
- hydraulic fluid
- cooling agents
- solvent-containing cleaning agents

must not leak into the ground or into the sewage system!

Such materials must be stored, transported, contained and recycled in suitable containers.

3 Designated Equipment Use

Hammers with holding spring resp. cap are especially used for breaking through light walls, light tearing down work, mortising, removing plaster, etc.

4 Installation

- Blow out air line and pressure hose, prior to connection it to the equipment.
- The hoses must be free of bends and kinks.
- Make sure, that all air lines have a sufficient cross-section and remove possible throttle areas.
- Connect the hammer as follows:

for the use with minimal lubrication connect to a filter-regulator consisting of Filter with condensation reservoir and pressure regulator

Air Consumption	Connecting thread	Part No.
0,05 - 0,5 m ³ /h	G 1/4	822408 A
0,15 – 0,9 m ³ /h	G 3/8	826981 A
0,5 – 1,5 m ³ /h	G 1/2	822409 A
0,8 – 6,0 m ³ /h	G 3/4	826982 A

in connection with a Point-of-Use Oiler (Part No. 378077 A)

- Check air pressure at F/R/L outlet. The Regulator needs to be adjusted to an airflow of 6.3 bar (90 PSI). A higher pressure than 6.3 bar leads to increased wear and tear. Pressure below 6.3 bar leads to performance loss.

5 Operation

Before start-up make sure to insert treating tool into the hammer as deeply as possible and securely lock it there. (see safety tips for hammers)



Before start-up make sure to check inserting/treating tool for secure holding. An inserting/treating tool getting loose may cause injuries.

Use permissible inserting/treating tools only!

Mind the presence of the o-ring and the locking pin on the screw cap.

6 Handling

Do not use the hammer unless minding all safety and maintenance instructions. Do not use the hammer without any “load”, because otherwise the piston stop may be destroyed.

Without the existence of a locking pin in the screw cap, hammer must NOT be operated. Handle may get loose and this will damage the tool (“dead” impacts).

7 Assembly - Disassembly

Disassembly: (see Spare Parts Drawing)



Prior to disassembly, disconnect equipment from air supply ! Only experienced maintenance personnel may assemble or disassemble this equipment.

After repair or maintenance, verify that equipment runs to specification!

Principally, use only DEPRAG original spare parts. Otherwise, a reduction in equipment power-output and an increased maintenance-requirement occurs. If NON-DEPRAG parts are installed, DEPRAG is justified to void any existing warranty and liability obligations.

1. Disconnect hammer from air supply.
2. Remove o-ring 802535.
3. Loosen locking pin 811971.

4. Clamp a holdfast between cylinder 811970/811969 and cap 210450.



Attention

Interior parts may be catapulted out of the tool when un-tightening nut Mutter 811965 and may cause injuries.

Try to loosen the nut as carefully and slowly as possible.

5. Use open wrench AF80 for loosening of nut 811965.
6. Remove locking pin 800981 and cylinder.
7. Take away piston, tubular slide, cylinder cover and silencer buffer.

Assembly:

1. Put piston into cylinder with the tapered end towards impact side of tool.
2. Set tubular slide, cylinder cover and silencer buffer onto cylinder in correct order.
3. Mount cylinder onto the cap locking it with pin 800981.
4. Clamp cylinder 811970/811969 and cap 210450 using a holdfast.
5. Tighten nut 811965 onto the cap. Drill a 5 mm hole into the groove of the nut until you reach cap 210450. Put locking pin 811971 into this hole.




Note:

Drilling hole depth: 5 mm maximum

6. Use o-ring 802535 to secure pin 811971 against dropping out.

7.1. Spare Parts Drawing

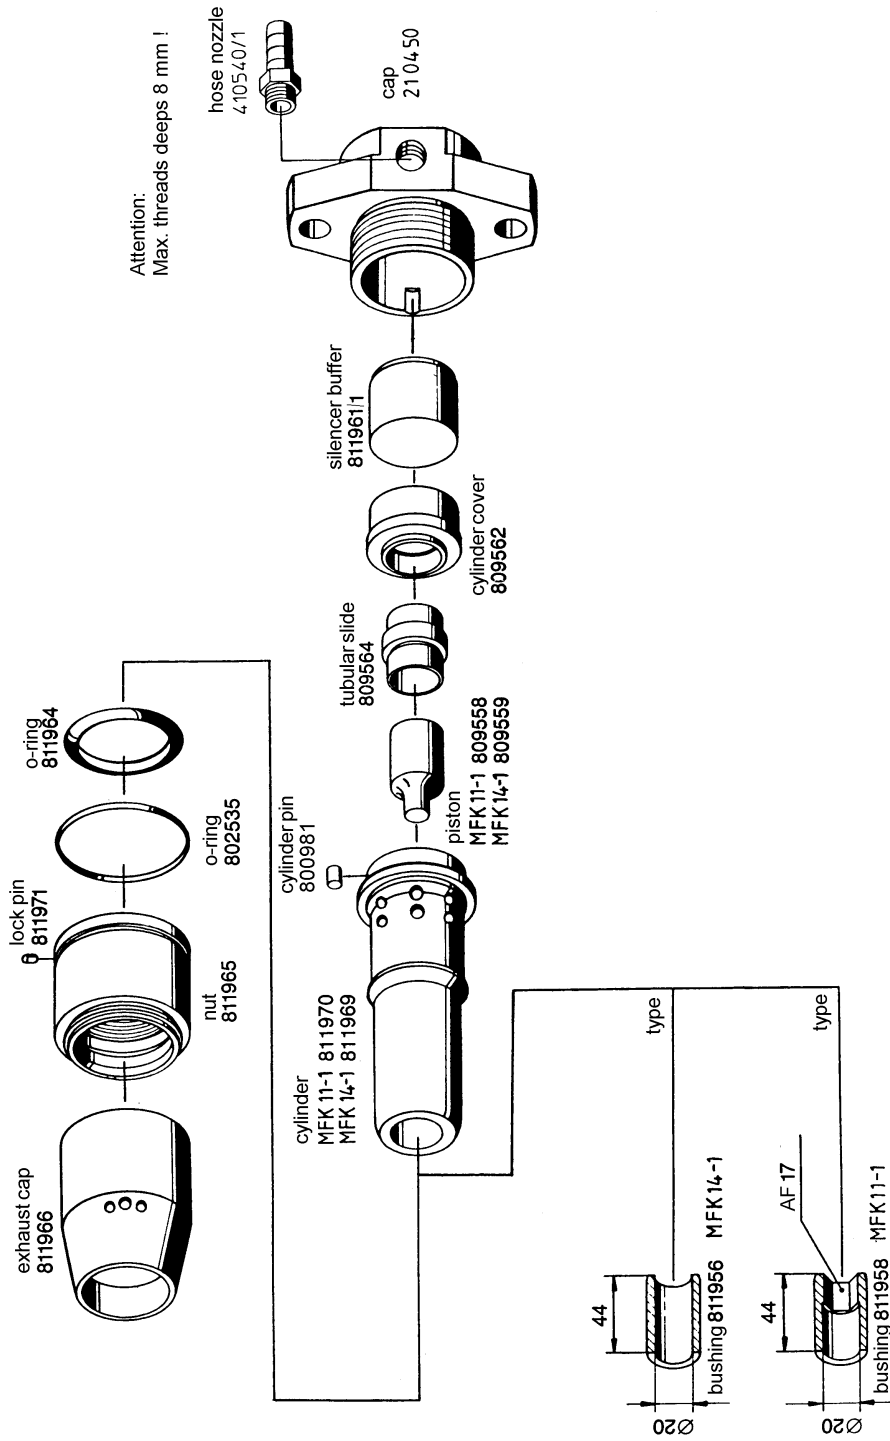

Example spare parts order: 1 off cap 21 04 50

8 Maintenance and Upkeep

Testing and maintenance can be provided by Operator. Incorrect assembly or disassembly may lead to injury of operators and damage the tool.

The tool requires little maintenance. If the following service instructions are observed, the tool will have a long life expectancy and will remain in a safe condition.

- Check tool on a regular basis for external damage.
- Check your maintenance unit on a regular basis, make sure that sufficient oil is in the lubricator (if lubrication is used) and that the adjustment is correct. We recommend for your lubricator DEPRAGOL, part 790081 E (250 cm³).
- We recommend to service the tool once a year or after 300 hours of operation.
- After assembly, fill 2 – 3 drops of DEPRAGOL into the air inlet nipple.
- In case of tool malfunctions, we recommend to send the machine to DEPRAG.
- Corrosion and filth are the major source of problems with the tool. When moving or storing the hammer, pay attention to the fact that no filth nor water may get into the tool through the air inlet, the chisel bush or the exhaust openings.
- Blow through the hoses before connecting them and check whether the screen in the screen support is clean.
- During operations only little lubrication is needed – however, after completion of the job protection by some oil layer is required.
- We recommend: Put some drops of oil into the air inlet.
- The inserting ends of the tool must be within dimension tolerances and clean and the impacting surface must be plane. Blunt inserting/treating tools will result in reduced performance and higher fatigue of hammer and operator.
- Normally the main lubricator on the compressor should suffice to lubricate the tools. When working with long-range hoses or at different height levels we would recommend to include an additional lubricator in the air lines.
- When operating tool in winter, use defrosting agent (such as Kilfrost).
- Preventive servicing will limit repair cost and avoid expensive breakdown

8.1. Wear Parts

MFK11-1

QUANTITY	NAME	PART No.
1	Bushing	811958
1	Piston	809558

MFK14-1

QUANTITY	NAME	PART No.
1	Bushing	811956
1	Piston	809559

8.2. Trouble Shooting

In case of a malfunction please check and observe all instructions contained in this technical documentation. If necessary, adjust equipment as needed.

Possible faults and their causes are shown below:

ERROR	REASON	SOLUTION
Insufficient Power	Air pressure too low	Minimum air pressure should be 90 PSI for maximum performance
	Restriction in air hose	Remove bends or other restrictions
	Hose I.D. is too small	Use required hose I.D.
	Screen Support clogged (if applicable)	Clean screen support or exchange with new one
Tool does not work after being out of use for some time	Gummy oil deposits, tool filthy	Flush tool, start it and then relubricate
	Tubular slide or piston may be rusty	Disassemble tool, clean parts, repolish rusty spots. Relubricate all parts and re-assemble them.
„Dead“ impacts	Inserting end / bushing worn off	Replace parts
	Piston's or inserting end's space of impact damaged or not absolutely plane and rectangular	Replace damaged parts
	Handle loose	Retighten handle
Tool stops abruptly	Seizing of piston or tubular slide.	Polish all possible points of contact and thoroughly lubricate parts.

If necessary, please send tool to DEPRAG for service.

9 Delivery Capacity

Please check the delivery capacity in regards to its completeness.

QUANTITY	NAME	PART No.
1	Operating Instruction Booklet	010395 EN
1	Chipping Hammer	210451 A/C

10 Storage

Unused machines should be stored in a dry, locked area.

11 Technical Data

Manufacturer DEPRAG SCHULZ GMBH u. CO.
Address Kurfürstenring 12 - 18 Postfach 1352
D-92224 Amberg D-92203 Amberg
Phone 09621/371-0
Fax 09621/371-120

MODEL NO.	MFK11-1	MFK14-1
PART No.	210451 C	210451 A
Round hex. shank RS 17,5/14,8 x 60	811950 D	811954 D
No. of impacts (min ⁻¹)	2200	1700
Air consumption (m ³ /min)	0,50	0,53
Piston diam. (mm)	30	30
Piston length (mm)	50	70
Piston stroke (mm)	77	109
Length (mm)	390	445
Weight (kg/lbs)	5,6	6,8
Required Hose I.D. (mm/in)	13	13
Connecting thread	G ¾ a	G ¾ a

12 Disposal

Unused machines should be stored in a dry, locked area. Observe local and environmental regulations for the separation and recycling of materials.



Recycle waste oil to avoid environmental contamination!

13 Conformity Declaration

EC-Conformity Declaration according to the EC-Machine-Guidelines 98/37/EC, Amendment IIA

We,

DEPRAG SCHULZ GMBH & CO.
PO Box 1352
D-92203 Amberg

hereby confirm, that the design of the
Hammer

MFK11-1

MFK14-1


conforms to the following, relevant regulation:

- EC-Machine-Guidelines, Version 98/37/EC, Amendment No. 1 and No. 2.2.

Applicable Standard:

- EN 292

Amberg, 09.03. 2004

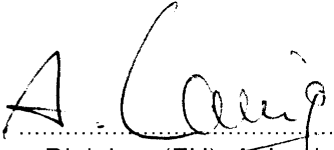
Dipl. Ing. (FH) A. Lanig
Mr. Design Dept.

14 Service Locations and Authorized Partners

ARGENTINIEN

ERIN s.a.
Av. Constituyentes 5751
RA-1431 Buenos Aires
Tel./Fax: +54 (0) 11 / 4573.1313

AUSTRALIEN

De Rossi Industrial Pty. Ltd.
Unit 1 – 2 / 600 Liverpool Road
Strathfield South, N.S.W. 2136
Tel.: +61 (0)2 / 8732.7200
Fax: +61 (0)2 / 8732.7299
e-mail: sales@derossi.com.au

BELGIEN

Aijkens en Zumpolle B.V.
Postbus 29
NL-5306 ZG
Brakel/Niederlande
Tel.: +31 (0)4 18 / 67 18 16
Fax: +31 (0)4 18 / 67 32 17
Internet: <http://www.zumpolle.net>
e-mail: info@zumpolle.net

BRASILIEN

METALFEMA Ltda.
Rua Saõ Pedro, 786
Saõ Leopoldo – RS –
BRAZIL
ZIP 93.010-260
Tel.: +55 (0) 51 / 592.4050
Fax: +55 (0) 51 / 590.1856
e-mail: mtfma@zaz.com.br

CHINA, SUZHOU

DEPRAG China
DEPRAG Assembly Technologies Co., Ltd.
No. 5, Xinghan St, Blk. A#06-16
Suzhou 215021, P.R. China
Tel.: +86 (0) 512 – 6767 – 1108
Fax: +86 (0) 512 – 6767 – 1109
Internet: www.deprag.com.cn
e-mail: biz@deprag.com.cn
e-mail: d.hua@deprag.com.cn

DÄNEMARK

DEPRAG Scandinavia AB
Gap Sundins väg 3
SE-63346 Eskilstuna
Tel.: +45 (0) 98 57 22 50
Fax: +45 (0) 98 57 22 53
Internet: <http://www.deprag.com>
e-mail: keld.branner@get2net.dk

DEUTSCHLAND

Werk Amberg
Kurfürstenring 12-18,
D-92224 Amberg
Postfach 1352,
D-92203 Amberg
Tel.: +49 (0) 9621 / 3 71-3 71
Fax: +49 (0) 9621 / 3 71-1 20
Internet: <http://www.deprag.com>
e-mail: info@deprag.de

ESTLAND

Pneumacon OY
Läkkisepäntie 4
FI-00620 Helsinki
Tel.: +358 (0) 9 / 7288.160
Fax: +358 (0) 9 / 7288.1610
Internet: <http://www.pneumacon.fi>
e-mail: info@pneumacon.fi
e-mail: harry.lindroos@pneumacon.fi

FINNLAND

Pneumacon OY
Läkkisepäntie 4
FI-00620 Helsinki
Tel.: +358 (0) 9 / 7288.160
Fax: +358 (0) 9 / 7288.1610
Internet: <http://www.pneumacon.fi>
e-mail: info@pneumacon.fi
e-mail: harry.lindroos@pneumacon.fi

FRANKREICH

DEPRAG France
9, rue du Général Frère
F-67500 Haguenau
Tel.: +33 388 / 06.14.17
Fax: +33 388 / 93.01.08
e-mail: depragfrance@evc.net

GRIECHENLAND

D. Panayotidis – J. Tsatsis s.a.
6 Pireos Street – Moschaton-
Athen
Tel.: +30 (0) 1 / 4810.817-8-9
Fax: +30 (0) 1 / 482 96 73

GROSSBRITANNIEN

DEPRAG Limited
Holly Farm Business Park
Honiley, Kenilworth
Warwickshire CV8 1NP
Tel.: +44 (0) 1926 485480
Fax: +44 (0) 1926 485481
Internet: www.deprag.co.uk
e-mail: m.searle@deprag.co.uk

IRAN

NACCARSON AIR TOOLS Co., Ltd.
Azadi Ave. No. 625
IR-Tehran 14 588
Tel.: +98 (0) 21 / 6006602 + 6015656
Fax: +98 (0) 21 / 6009451

IRLAND

Production Equipment Ltd.
Riverside Commercial Estate
IRL-Galway
Tel.: +353 (0) 91 / 745 100
Fax: +353 (0) 91 / 751 299
e-mail: sales@productionequipment.ie

ITALIEN

DREX PALLOTTI S.r.l
Via A. Manzoni, 19
I-20090 Vimodrone/Mi
Tel.: +390 02 / 2740 0561 + 0569
Fax: +390 02 / 2740 0607
e-mail: pallotti@drex.com

JAPAN

NIPPON GESCO Ltd.
P.O. Box 255 Kyobashi Tokyo
Ginza Matsuyoshi Bldg.
17 – 8, 7-Chome, Ginza,
Chuo-Ku, Tokyo
Tel.: +81 (0) 3 / 3542.2400
Fax: +81 (0) 3 / 3542.2420
e-mail: mail@gesco.co.jp

KOREA (Süd)

Handwerkzeuge
DONG WON POWER-TECH.INC.
108-10 Moonjung-Dong
Songpa-Ku
Seoul, Korea
Tel.: +82 (0) 2 / 409.1344
Fax: +82 (0) 2 / 409.1345
e-mail: kilpyungdw@dreamwiz.com
Schraubtechnik / Assembly
Technology Fatec Co.Ltd.
#903, Sunglim B/D 257
Chulsan-Dong
Kwangmyung-City,
Kyunggi-Do
Tel.: +82 (0) 2 / 2 688.2152
Fax: +82 (0) 2 / 2 688.2842
e-mail: fatec@chollian.net
e-mail: fatec@fatec.co.kr

KROATIEN

SM AUTOMATIKA D.O.O
Trg i. Kukuljevica 6
HR-10090 Zagreb
Tel.: +385(0)13 89 41 79
Fax: +385(0)13 87 89 78
Internet: <http://www.sm-automatika.hr>
e-mail: info@sm-automatika.hr

LITAUEN

HIDROTEKA
P.O. Box 572
LT-3028 KAUNAS
Tel.: +370 (0) 37 / 352195
Fax: +370 (0) 37 / 351952
e-mail: hidroteka@hidroteka.lt

LUXEMBURG

Comptoir Technique et Industriel
321, Route d'Arlon
L-8011 Strassen
Penang, MALAYSIA
Tel. +352 / 31 31 40
Fax: +352 / 31 31 95

MALAYSIA

FI INNOVATION ENTERPRISE
175, MK D Jalan Bahru
Balik Pulau 11000
Penang, MALAYSIA
Tel. +60/13/ 449.0386 / +60/16/ 403.6797
Fax: +60/4/ 866.0785
e-mail: farisfi@tm.net.my

NIEDERLANDE

Zumpolle B.V.
Postbus 29
NL-5306 ZG
Brakel/Niederlande
Tel.: +31 (0) 4 18 / 67 18 16
Fax: +31 (0) 4 18 / 67 32 17
Internet: <http://www.zumpolle.net>
e-mail: info@zumpolle.net

NORWEGEN

Deprag Scandinavia AB
Gap Sundins väg 3
SE-63346 Eskilstuna
Universal Import
Tel.: +47 (0) 2 / 2681.530
Fax: +47 (0) 2 / 2199.127

ÖSTERREICH

Amersin Olschinsky GmbH
Carlberggasse 45
A-1230 Wien
Tel.: +43 (0)1 / 8 69 87 66
Fax: +43 (0)1 / 8 65 16 97
Internet: <http://www.amersin.at>
e-mail: information@amersin.at

POLEN

ELKREM SPOLKA Z O.O.
ul. Wielki Row 40B
87-100 Torun
Tel. +48 / 56 / 662.3881
FAX +48 / 56 / 662.3882
e-mail: elkrem@to.onet.pl

PORTUGAL

Anibal Pires Lda.
A.P. 23
E.N. 1 – Mourisca do Vouga
P-3750 TROFA AGD
Tel.: +351 (0) 234 / 646.820
Fax: +351 (0) 234 / 646.815
Internet: <http://www.anibalpires.pt>
e-mail: anibalpires@mail.telepac.pt

SCHWEDEN

DEPRAG Scandinavia AB
Gap Sundins Väg 3
S-633 46 Eskilstuna
Tel.: +46 (0) 16-12 61 10
Fax: +46 (0) 16-13 31 88
Internet: <http://www.deprag.se>
e-mail: info@deprag.se

SCHWEIZ

Limatec Automation AG
Schlachthausstrasse 15
CH-2540 Grenchen
Tel.: +41 (0) 32 / 6542904
Fax: +41 (0) 32 / 6542901
Internet: <http://www.limatec.ch>
e-mail: office@limatec.ch

SINGAPUR

Testel Systems Pte Ltd
1200 Depot Road # 04-07/09
Singapore 109675
Tel.: +65 / 6271-3688
Fax: +65 / 6271-8866
Internet: <http://www.testel.com.sg>
e-mail: sunny@testel.com.sg

SLOWENIEN

MB-NAKLO D.O.O.
Toma Zupana 16
SLO-4202 NAKLO
Tel.: +386 (0) 4 / 277 17 00
Fax: +386 (0) 4 / 277 17 17
e-mail: mb-naklo@siol.net

SPANIEN

ALCOTAN SISTEMAS S.A.
pº de la Direccion, nmro. 95,
local
E-28039 Madrid
Tel.: +349 (0) 1 / 311.17.84 + 311.18.01
Fax: +349 (0) 1 / 311.60.53
e-mail: alcotansis@jazzfree.com

Barcelona office:
Passeig de la Mare de Déu del
Coll, 122-124
E-08023 Barcelona
Tel.: +349 (0) 3 / 2 19 77 43

TAIWAN

I HEN MACHINE Co.Ltd.
6F-9, No. 12, Lane 609, Sec. 5
Chung-Hsin Road,
San-Chung City
241 Taipei Hsen
Tel.: +886 (0) 2 / 2999.6766
Fax: +886 (0) 2 / 2999.6236

TSCHECHIEN/SLOWAKEI

DEPRAG CZ a.s.
ul. T.G. Masaryka 113
CZ -50781 Lázně Bělohrad
Tel.: +420 (0) 4 93 / 79 24 11
Fax: +420 (0) 4 93 / 79 25 12
Internet: <http://www.deprag.com>
e-mail: info@deprag.cz

TÜRKEI

MEKA AUTOMOTIVE ASSEMBLY EQUIPMENTS
Dicle Caddesi, Tunca Sokak No : 6
Beysukent - Beytepe - Ankara -
TURKEY
Tel. +90 / 312 / 236 2558
Tel. +90 / 312 / 236 2559
FAX +90 / 312 / 236 0991
e-mail: melih@me-ka-assembly.com
www.me-ka-assembly.com

UNGARN

ADLER '91
Export/Import Kereskedelmi
Takarék u. 18/B
H-8800 Nagykánizsa
Tel./Fax: +36 (0) 93 / 314 633
e-mail: adler91adlovits@broadband.hu

Nóniusz Tool Trading House Ltd.

Kőbányai út. 47/6
H-1101 Budapest
Tel.: +36 (0) 1 / 260 030 30
Fax: +36 (0) 1 / 260 060 83
Internet: <http://www.noniusz.hu>
e-mail: noniusz@noniusz.hu

USA, MEXIKO, KANADA

DEPRAG INC.
645 Hembry St. / P.O. Box 1554
Lewisville, TX 75057-4726
Phone: +1 / 972 / 221 – 8731
Fax: +1 / 972 / 221 – 8163
Toll Free: (800) 4 DEPRAG
Internet: <http://www.deprag.com>
e-mail: deprag@depragusa.com

VENEZUELA


Suministros Tecnicos SUMTEC C.A.
Av. Francisco de Miranda, Centro Plaza
Torre C, Piso 16, Oficina C16 A-B
Urb. Los Palos Grandes
Caracas 1060
Tel.: +58 (0) 212 – 28 56 41 0
Fax.: +58 (0) 212 – 28 51 94 7

DEPRAG

DEPRAG SCHULZ GMBH u. CO.

Postfach 1352, D-92203 Amberg

Kurfürstenring 12-18, D-92224 Amberg

 (09621) 371-0

Fax (09621) 371-120

Internet: <http://www.deprag.com>

e-mail: info@deprag.de



ZERTIFIZIERT NACH DIN EN ISO 9001
